

Vertical Lifting Clamp (QC-A type)

◆ Power lifting equipment

POWER





Features:

- Bi-directional swivel lifting shackle for versatile lifting.
- Safety lock prevents load slips during operation, irregardless of rope tension.
- All clamps are tested with 1.5 times the rated capacity.
- Easy construction with minimal maintenance.
- Small, compact and lightweight.


Applications:

- For vertical lifting and transporting of flat steel plates, structures.
- Turning over of flat steel plates.

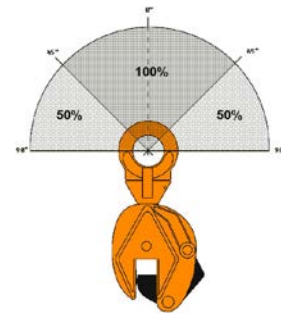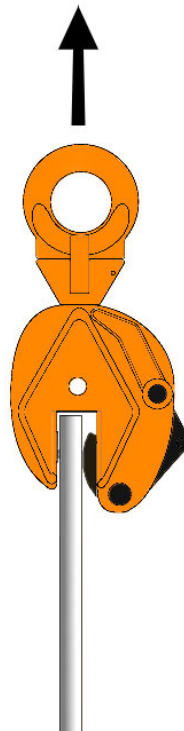

Maximum load capacity with swivel

Vertical Lifting Clamp (QC-A type)

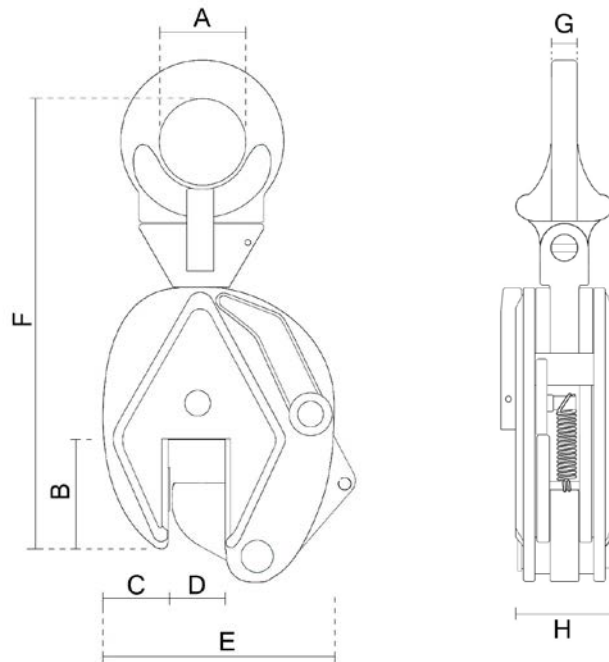

Model		0.5T	1.0T	2.0T	3.0T	5.0T
Rated capacity		0.5	1	2	3	5
Test load (KN)		7.35	14.7	29.4	44.1	73.5
Max. Jaw opening		15	20	25	30	50
Dimensions: (mm)	A	Φ 30	Φ48	Φ68	Φ74	Φ80
	B	43	63	76	85	90
	C	34.5	51	59	56	65
	D	0-15	0-20	0-25	0-30	0-50
	E	103	138	164	193	240
	F	212	294	370	418	450
	G	10	12	16	20	22
H		36	50	52	78	88
Weight (kg)		2	4.8	6.5	15	23
Volume (cm)		23x5x11.5	31x7x16	38x8x19	45x11x22	48x14x22